





"Y" TYPE CYLINDER CONTROL VALVES

Y型汽缸式控制閥

適合液體：水、空氣、蒸氣、油
 SUITABLE FLUIDS : WATER, AIR, STEAM, OIL.
 工作壓力：0-20Kg/cm²
 WORKING PRESSURE
 工作溫度：0°C-180°C
 WORKING TEMP

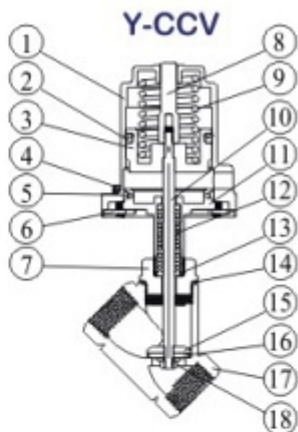


材質表 General matreial		
NO.	NAME	MATERIAL
1	CYLINDER	SS304
2	UHS-RING	NBR
3	PISTON	AL
4	SCREW	SS304
5	O-RING	NBR
6	FIXED NUT	SS304
7	VALVE NUT	SS316
8	INDICATOR SHAFT	AL
9	SPRING	SS304
10	SHAFT	SS316
11	CYLINDER BASE	SS316
12	SPRING	SS304
13	GASKET	PTFE
14	GASKET	PTFE
15	SEAT	SS304
16	GASKET	PTFE
17	BODY	SS316
18	NUT	SS316

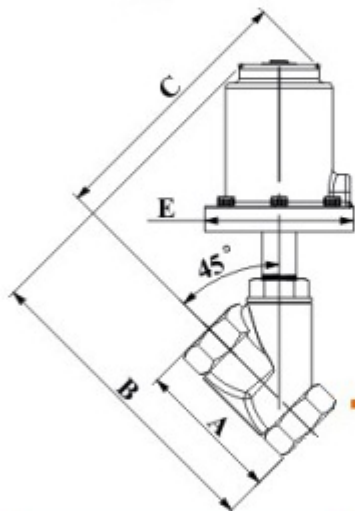

尺寸表 Dimension

SIZE		A	B	C	E	MAX.PRESSURE (Kg/cm ²)	OPERATING PRESSURE (Kg/cm ²)
mm	W						
8	1/4	65.5	174	150	93	0-16	3-10
10	3/8	65.5	174	150	93	0-16	3-10
15	1/2	65.5	174	150	93	0-16	3-10
20	3/4	75	182	157	93	0-16	3-10
25	1	90	192	164	93	0-16	3-10
32	1-1/4	111.5	234	203	117	0-16	3-10
40	1-1/2	122	241	205	117	0-16	3-10
50	2	152	256	212	117	0-16	3-10
65	2-1/2	182	248	252	117	0-16	3-10

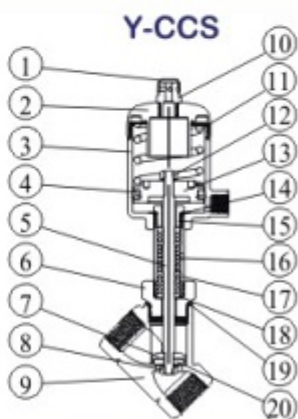

適合液體：水、空氣、蒸氣、油
 SUITABLE FLUIDS : WATER, AIR, STEAM, OIL.
 工作壓力：0-20Kg/cm²
 WORKING PRESSURE
 工作溫度：0°C-180°C
 WORKING TEMP

材質表 General matreial		
NO.	NAME	MATERIAL
1	COVER	SS304
2	CYLINDER COVER	SS304
3	CYLINDER	SS304
4	UHS-RING	NBR
5	SHAFT	SS316
6	VALVE NUT	SS316
7	SEAT	SS304
8	NUT	SS316
9	BODY	SS316
10	BREATHE NUT	BRASS
11	SPRING	SS304
12	NUT	SS316
13	PISTON	AL
14	O-RING	NBR
15	STUD BOLT	BRASS
16	SPRING	SS304
17	MEDIUM TUBE	SS304
18	GASKET	PTFE
19	MAT SLICE	COPPER
20	GASKET	PTFE

尺寸表 Dimension

SIZE		MAX.PRESSURE (Kg/cm ²)	OPERATING PRESSURE (Kg/cm ²)
mm	W		
15	1/2	0-16	3-10
20	3/4	0-16	3-10
25	1	0-16	3-10