

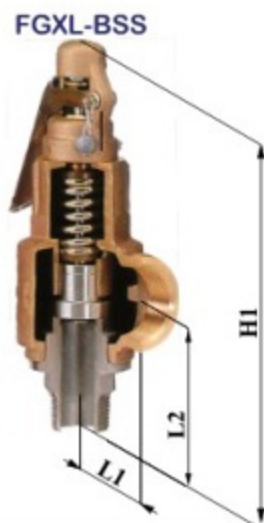


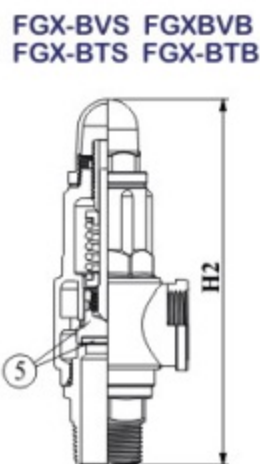

SAFETY VALVE

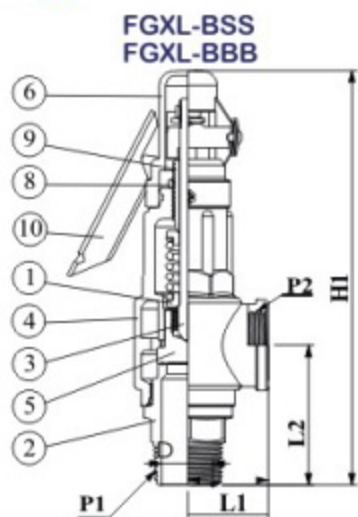

材質表 General material

NO.	NAME	TYPE	Material							
			FGXL-BSS 手拉式 Safety Valve with Lever metal to metal	FGX-BSS 密封式 Safety Valve with Sealing metal to metal	FGXL-BVS 手拉式 Safety Valve with Lever Disc insert Viton	FGX-BVS 密封式 Safety Valve with Sealing Disc insert Viton	FGXL-BTS 手拉式 Safety Valve with Lever Disc insert PTFE	FGX-BTS 密封式 Safety Valve with Sealing Disc insert PTFE		
1	閥體 VALVE BODY		BRONZE	BRONZE	BRONZE	BRONZE	BRONZE	BRONZE		
2	閥座 VALVE SEAT		SS304	SS304	SS304	SS304	SS304	SS304		
3	頂針 SPINDLE		BRASS	BRASS	BRASS	BRASS	BRASS	BRASS		
4	彈簧座 SPRING SEAT		BRASS	BRASS	BRASS	BRASS	BRASS	BRASS		
5	緩衝塞 DISC		SS304	SS304	SS304+VITON	SS304+VITON	SS304+PTFE	SS304+PTFE		
6	閥蓋 CAP		BRONZE	BRASS	BRONZE	BRASS	BRONZE	BRASS		
7	彈簧 SPRING		STEEL	STEEL	STEEL	STEEL	STEEL	STEEL		
8	螺帽 NUT		BRASS	BRASS	BRASS	BRASS	BRASS	BRASS		
9	調整螺絲 ADJUST SCREW		BRASS	BRASS	BRASS	BRASS	BRASS	BRASS		
10	把手 HANDLE		STEEL	-	STEEL	-	STEEL	-		
使用壓力 WORKING PRESSURE(Kg/cm ²)			0.1~40			0.1~40			0.1~40	
使用溫度 WORKING TEMP.(°C)			-196°C~225°C			-40°C~200°C			-40°C~200°C	

尺寸表 Dimension

NOMINAL	PI	*	D	*	P2	LIFT	L1	L2	H1	H2	單重(Kg)		單重(Kg)		單重(Kg)	
											FGXL-BSS	FGX-BSS	FGXL-BVS	FGX-BVS	FGXL-BTS	FGX-BTS
1/2	*	15	*	3/4	1.04	35	53.5	169	144.6	0.755	0.66	0.755	0.66	0.755	0.66	
1/2	*	15	*	1	1.52	39	63	196.5	172.6	1.278	1.08	1.278	1.08	1.278	1.08	
3/4	*	19.5	*	1	1.52	39	62.5	196	172.1	1.25	1.06	1.25	1.06	1.25	1.06	
1	*	21	*	1	1.52	39	68	201.5	177.6	1.25	1.06	1.25	1.06	1.25	1.06	
1	*	26	*	1 1/4	2	52	74.5	215.5	197.1	2.03	1.96	2.03	1.96	2.03	1.96	
1 1/4	*	33	*	1 1/2	2.56	58.5	88.5	245.5	227.1	2.64	2.55	2.64	2.55	2.64	2.55	
1 1/2	*	39	*	2	3.04	64.5	100.5	284.5	258.1	4	3.92	4	3.92	4	3.92	
2	*	39	*	2	3.04	64.5	103.5	287.5	261.1	4.36	4.11	4.36	4.11	4.36	4.11	
2	*	50	*	2 1/2	4	72	110	303	276.6	5.5	5.29	5.5	5.29	5.5	5.29	

材質表 General material

NO.	TYPE NAME	FGXL-BBB	FGX-BBB	FGXL-BVB	FGX-BVB	FGXL-BTB	FGX-BTB
		手拉式 Safety Valve with Lever metal to metal	密封式 Safety Valve with Sealing metal to metal	手拉式 Safety Valve with Lever Disc insert Viton	密封式 Safety Valve with Sealing Disc insert Viton	手拉式 Safety Valve with Lever Disc insert PTFE	密封式 Safety Valve with Sealing Disc insert PTFE
1	閥體 VALVE BODY	BRONZE	BRONZE	BRONZE	BRONZE	BRONZE	BRONZE
2	閥座 VALVE SEAT	BRASS	BRASS	BRASS	BRASS	BRASS	BRASS
3	頂針 SPINDLE	BRASS	BRASS	BRASS	BRASS	BRASS	BRASS
4	彈簧座 SPRING SEAT	BRASS	BRASS	BRASS	BRASS	BRASS	BRASS
5	緩衝塞 DISC	BRASS	BRASS	BRASS+VITON	BRASS+VITON	BRASS+PTFE	BRASS+PTFE
6	閥蓋 CAP	BRONZE	BRASS	BRONZE	BRASS	BRONZE	BRASS
7	彈簧 SPRING	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL
8	螺帽 NUT	BRASS	BRASS	BRASS	BRASS	BRASS	BRASS
9	調整螺絲 ADJUST SCREW	BRASS	BRASS	BRASS	BRASS	BRASS	BRASS
10	把手 HANDLE	STEEL	-	STEEL	-	STEEL	-
使用壓力 WORKING PRESSURE (Kg/cm ²)		0.1~20		0.1~50		0.1~50	
使用溫度 WORKING TEMP.(°C)		-196°C~225°C		-40°C~200°C		-40°C~200°C	

尺寸表 Dimension

NOMINAL					LIFT	L1	L2	H1	H2	單重(Kg)		單重(Kg)	
P1	*	D	*	P2						FGXL-BBB	FGX-BBB	FGXL-BVB FGXL-BTB	FGX-BVB FGX-BTB
1/2	*	15	*	3/4	1.04	35	52.5	168	143.6	0.73	0.65	0.73	0.65
3/4	*	20	*	1	1.52	39	64.8	198.3	174.4	1.3	1.18	1.3	1.18
1	*	25	*	1 1/4	2	52	72.5	213.5	195.1	1.89	1.3	1.89	1.3
1 1/4	*	32	*	1 1/2	2.56	58.5	88.5	245.5	227.1	2.48	2.3	2.48	2.3
1 1/2	*	40	*	2	3.04	64.5	100.5	284.5	258.1	4.02	3.2	4.02	3.2
2	*	50	*	2 1/2	4	72	107	300	273.6	5.55	5.3	5.55	5.3
2 1/2	*	65	*	2 1/2	4.56	72	107	300	-	5.8	-	-	-

安全閥 SAFETY VALVES



3/4"

S20



材質 SS303

1/8~1/4"

S30



1/2"

AZ-04



3/8~1/2"

CVS



1/4"~1"

HOP-411A



1/4"

HOP-411B



1/4"

HOP-411C



1/2"~3/4"

HOP-411D



1/4"

HOP-411E



1/2"~1"

HOP-411F